

Kelin renkli su bazlı epoksi fayans harcından sonra geliştirilmiş yeni bir üründür, sadece renkli su bazlı epoksi fayans harcının dokusunu korumakla kalmaz, ürün performansını yükseltir, aynı zamanda inşaatı daha kolay ve daha kullanışlı hale getirir. Yumuşak doku, düşük anahtarlı lüks dekoratif tarzınızı büyük ölçüde gösterir. Renk çeşitleri, dekorasyon mekanınızı pırıl pırıl yapar. Çevre dostu epoksi reçine alt taban kursu, ürününüzün daha su geçirmez, aşınmaya dayanıklı, küf ve nem geçirmez olmasını sağlar. Yüksek sıcaklıkta kalsine edilen doğal kum, rengi daha doğal ve güzel hale getirir ve asla solmaz. Ayrıca yapıştırdıktan sonra sararma veya renk açmadan porselen kadar parlaktır. Ayrıca derz yüzeyi tıpkı doğanın kendisi gibi seramik karoya mükemmel uyum sağlar.

ürünü [Çin el harç pompaları üreticisi](#) duvardaki seramik karo, taş, cam, mozaik karo veya un banyo, mutfak, yatak odası vb. birleşim yerlerinde daha iyi kullanılabilir. Avustralya, daha iyi performans elde etmek için ortak araştırma ve geliştirme ürünleri ve ürünlerin kalitesini istikrarlı hale getirmek için Çin Bilimler Akademisi stratejik kalite kontrol rehberliği aracılığıyla. [Kelin kiremit harcı yükseltici](#) size kaliteli ürünler sunmak.



**Seçtiğiniz için renk çeşitleri. Ayrıca özel renkler sağlar.**

Gray 1#

Gray 2#

Gray 3#

Gray 4#

Gray 5#

Gray 6#

Gray 7#

Gray 8#

Gray 9#

Cement Gray

Dull Gray

Silver Gray

Metal Gray

Luxury Silver

Glacier White

Calaeatta

Pearl Gold

Slate Gray

Terra Brown

Greyish Green

Yellow Gray

Soft Khaki

Yellowish Brown

Olive Brown

Brownness


Dark Brown

Reddish Brown

Rock Bslack



**Tüm Oda Boşluğu Çözümü Sağlayın**

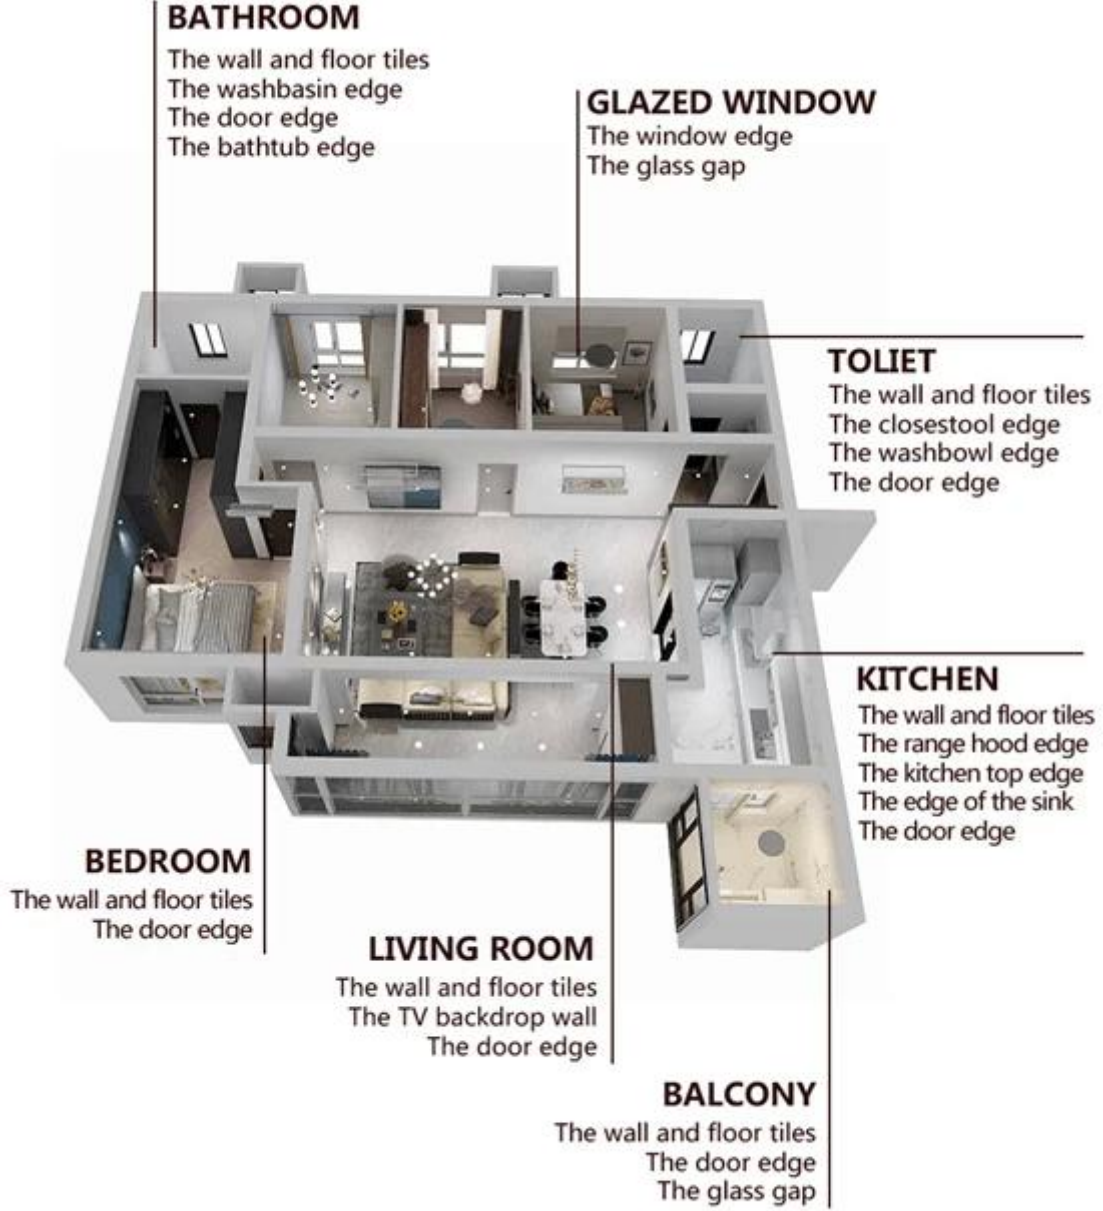

## Kısa İnşaat Süreci





01  
Clean the tiles and keep it dry



02  
Polish with tile wax except the glazed tile



03  
Open & Watch, both sides can extruded meanwhile



04  
Screw on the nozzle, put on the grout gun



05  
Inclined cut the top of the nozzle in 45°



06  
Squeeze out 60-80cm long grout in the forepart



07  
Evenly squeeze out the tile agent along the gap



08  
Press the grout with professional glue-press tools



09  
Don't touch in 4-5 hours and remove excess grout then.



10  
Keep the tiles dry in 24 hours

## Profesyonel Ortak Presleme Aleti



Two Component Caulking Gun



02  
Cutter Knife



03  
Pointing trowel



04  
Brush



05  
Forming Stick



06  
Perching Knife



07  
Masking Tape



08  
Stainless Steel Ball



09  
Cleaning Awl

## Şirket Avantajı



### Fabrikaya Genel Bakış



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

**sertifika**

